


Plastic Industry Thermocouples

European Fixed Adjustable Bayonet

Model Code: **H3**

Maximum operating temperature: 900F or 500C

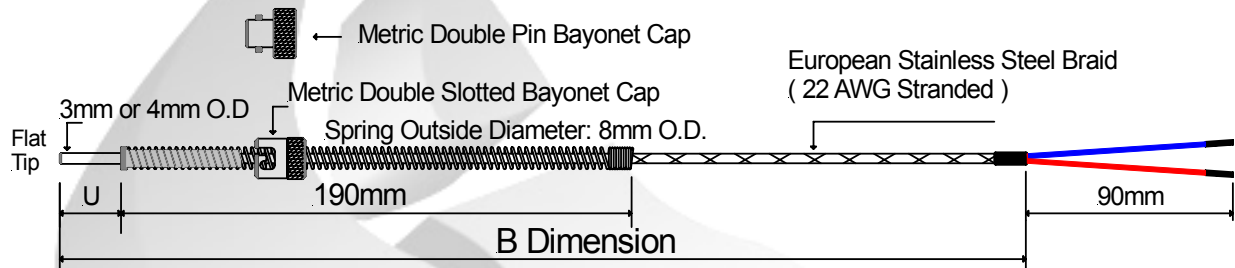

Steps To Follow:

Model: **H3** 1. 2. 3. 4. 5. 6. 7.

1.	Probe Tip Diameter
A	3mm Outside Diameter
B	4mm Outside Diameter

2.	"U" Dimension
	"U" = <u>2 5</u> mm Length In MM

3.	Bayonet Cap Option
A	M12 Bayonet Cap
B	M14 Bayonet Cap
C	M16 Bayonet Cap
D	Double Pin Bayonet Cap

4.	"B" Dimension
	"B" = <u>0 4 8</u> Length In Inches OR "B" = <u>3 M</u> Length In Meters

5.	Termination Type
A	3 1/2" Split Leads & 1/2" Bare Ends.
B	3 1/2" Split Leads & Pin Connectors
C	Standard Male Plug
D	Standard Female Jack
E	Mini Male Plug
F	Mini Female Jack

6.	Calibration
J	(+) Iron Vs. (-) Constantan
K	(+) Ni.-Chromium Vs. (-) Ni.-Aluminum

7.	Junction Styles		
		Grounded	Ungrounded
	Single	G	U
	Dual	D	Y

Nordic Sensors Ind. Inc. Tel: 1-888-667-3421 & Fax: 1-888-867-9986.