


SPECIAL THERMOCOUPLE ASSEMBLIES

Flanged Style Tube & Wire Thermocouple Probe

Model Code: **Z1**

Maximum operating temperature: 900F or 500C

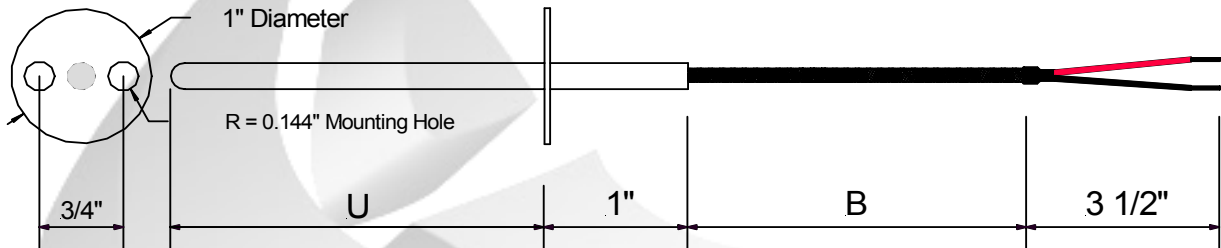

Model: A B C D E F G H I J K

Z1

A	Outside Diameter
A	1/8"
B	3/16"
C	1/4"
D	5/16"

B	"U" Dimension
Specify "U" Length In Inches <u>06</u>	

Example "U" is 6" = 06

C	"U" Length Fractional
A	0"
B	1/8"
C	3/16"
D	1/4"
E	1/2"
F	5/8"
G	3/4"
H	7/8"

D	"B" Dimension
Specify "B" Length In Inches <u>048</u>	

Example "B" is 48" = 048

E	Calibration	
	+	-
J	White	Red
K	Yellow	Red
T	Blue	Red

F	Junction Styles		
Element Description	Grounded		Ungrounded
	Common	Common	Isolated
Single	G		U
Duplex	D	C	I

G	Cable Conductor Description
1	24 Gage, Solid Conductor
2	24 Gage, 7 Stranded Conductors
3	20 Gage, Solid Conductor
4	20 Gage, 7 Stranded Conductors

H	Cable Insulation Description
A	Fiberglass Insulation: 950F / 510C
B	Teflon Insulation: 500F / 260C
C	P.V. C. Insulation: 221F / 105C
D	Teflon, Shielded + Drain Wire
E	P.V.C., Shielded + Drain Wire

I	Outer Jacket Protection
1	None
2	Stainless Steel Braid
3	Armor Flexible Cable: 0.280" Outside Diameter
4	Armor Flexible Cable 0.210" Outside Diameter

Metal Braid Protection not available on P.V.C insulation cable.

J	Termination
A	3 1/2" Split leads & bare ends
B	3 1/2" Split leads & No. 10 spade lugs.
C	Standard Male Plug (350 F)
D	Standard Female Jack (350 F)
E	Mini Male Plug (350 F)
F	Mini Female Jack (350 F)

K	Termination Options
1	None
2	Bx Connector
3	Cable Clamp

Nordic Sensors Ind. Inc. Tel: 1-888-667-3421 & Fax: 1-888-867-9986.